

ACB-100 SERIES BALL CHECK VALVE DUCTILE IRON

DN32-DN500



FLANGED CONNECTION

THREADED CONNECTION (BSP)

FEATURES

- Full bore ductile iron body.
- Higher pressure rating compared to other ball checks.
- Self-cleaning sinking type silent nitrile coated ball.
- Inside and outside epoxy-coating.
- Low pressure drop.
- Removable bonnet for cleaning or changing the ball without disassembly out of the pipeline.
- Horizontal and vertical installation in the pipeline.
- Light weight design for easy installation.

OPTIONS

Other flange connections.
Size above 500mm available.
Various ball types including floating type ball.

TECHNICAL DATA

Size Range
DN50-DN500 (Flanged)
DN32-DN65 (Threaded)

Pressure Classes
PN16

Face to Face
EN-558-1 series 48 (DIN3202 F6)

Temperature Range
10°C to +80°C

Threaded Connection:
BSP

TECHNICAL DATA

Flange Drilling
AS4087 PN16

Leakage Tests
EN12266

Coating
Fusion Bonded Epoxy

Minimum Backpressure
0.3-0.5bar


ACB-100 SERIES

BALL CHECK VALVE DUCTILE IRON PN16

DN32-DN500

MATERIAL SPECIFICATIONS & PARTS LIST


FIGURE 3. FLANGED CONNECTION

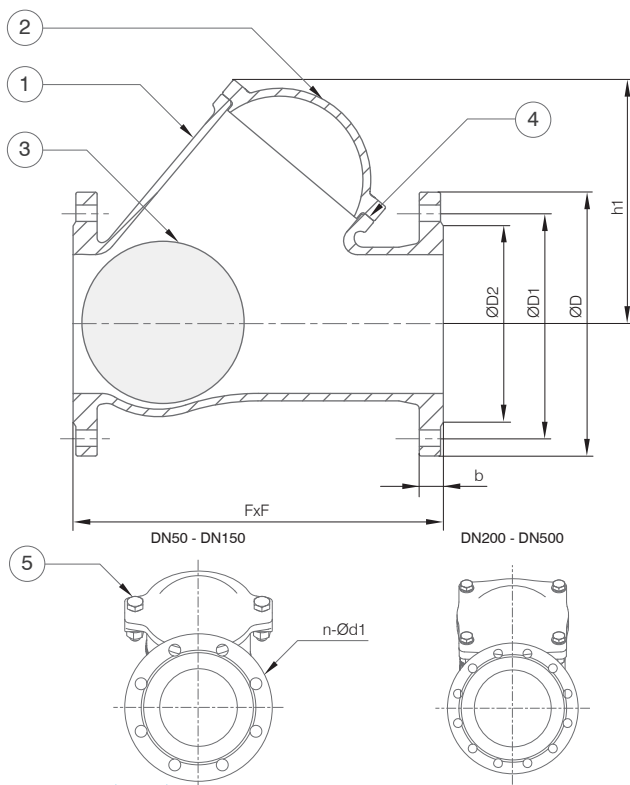

No Description Material / Standard

1	Body Ductile Iron
2	Bonnet PTFE
3	Ball Steel & NBR (standard) Steel & EPDM (optional)
4	Bonnet Gasket NBR (standard) EPDM (optional)
5	Bolts Stainless Steel

FIGURE 4. THREADED CONNECTION

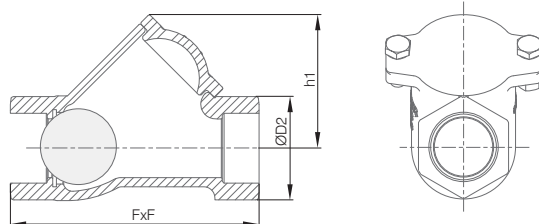

DIMENSIONS (MM)

ABC-1000 Series Flanged Connection								
DN	FxF	b	h1	ØD	ØD1	ØD2	n-Ød1	Weight (kg)
50	200	19	100	165	114	90	4-18	6.5
65	240	19	125	185	127	103	4-18	11
80	260	19	136	200	146	122	4-18	14.35
100	300	20	185	220	178	154	4-18	19.98
125	350	20	196	250	210	186	8-18	30.4
150	400	23	265	285	235	207	8-18	42.3
200	500	23	340	340	292	264	8-18	73.5
250	600	24	420	405	356	328	8-22	128
300	700	30	480	460	406	374	12-22	180
350	800	33	580	505	470	438	12-26	290
400	900	33	730	580	521	490	12-26	420
500	1100	33	900	705	641	609	16-26	580



ABC-1000 Series Threaded Connection				
DN	FxF	h1	ØD	Weight (kg)
32	135	72	50	2
40	145	85	60	2
50	175	100	70	3
65	200	125	90	5

ACB-100 SERIES

BALL CHECK VALVE DUCTILE IRON PN16

DN32-DN500

PRESSURE DROP GRAPH

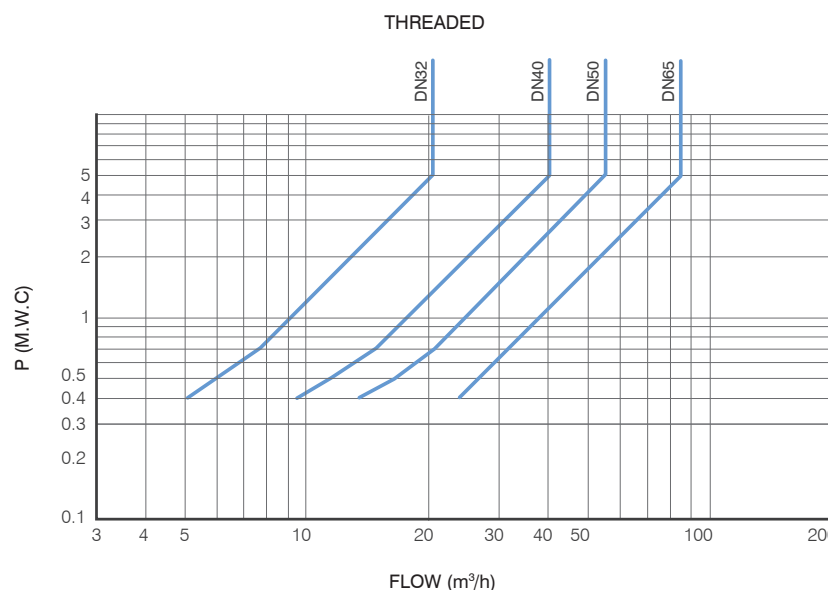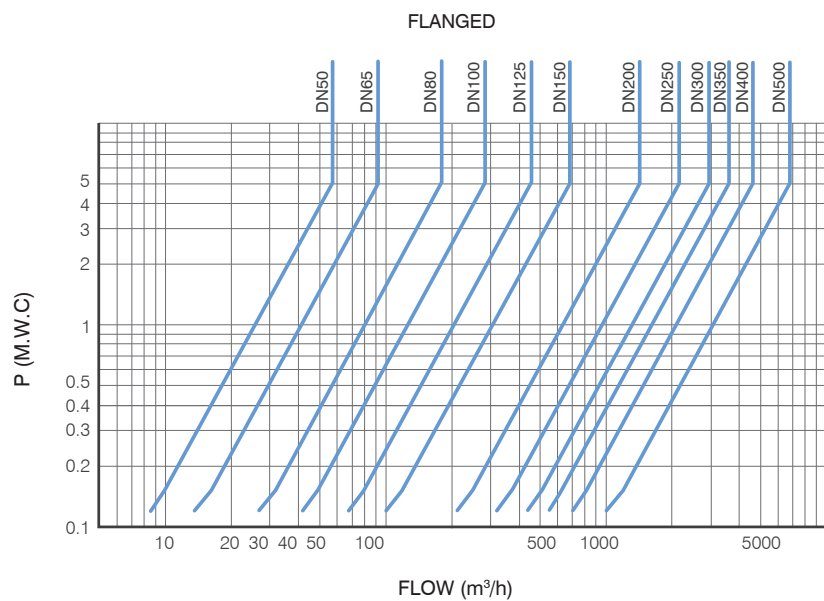

MOUNTING IN PIEPLINE

FIGURE 1. HORIZONTAL INSTALLATION

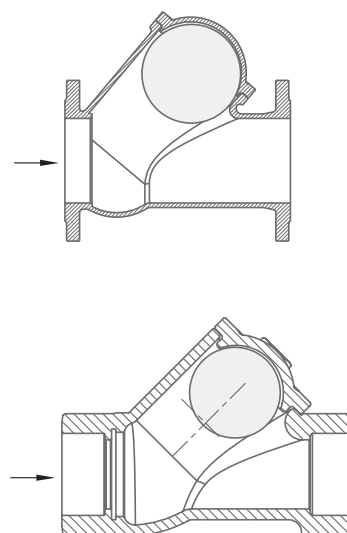


FIGURE 2. VERTICAL INSTALLATION

