



- Carbon Steel or Stainless Steel
- Sizes 2" to 12"
- Flanged ANSI Class 150 or 300

FEATURES

- Offset inlet/outlet design
- Basket perforations from 1/32" to 1"
- 20 to 400 mesh linings for fine straining applications

OPTIONS

- Quick Open cover or davit assembly bolted cover
- Alloy construction for body and baskets
- ASME Code construction
- Backflushing system for manual automated cleaning
- Steam jacket for highly viscous fluids
- Coatings and linings available upon request

Duplex Housing for Continuous Operation

Cover Type Openings

For applications with infrequent basket changing, offers a simple, cost-effective, bolted cover type. It's available with a davit assembly cover for larger strainers with heavy covers, this makes it possible for a one-person operation.

For applications with more frequent changing, offers a hinged, quick opening cover secured by swing bolts. This is adaptable for higher pressure applications. For medium size strainers, 8" to 12," a bolted slide hinge cover



is available. This permits one operator to engage the hinge and open the cover.

Strainer Screens

Strainer screens are stainless steel or other specified materials.

Backflush/backwash Option

In systems with heavy, well-defined solids and sediment, this option backflushes the system without shutting the system down. A piping connection with an on/off backflush valve is fabricated at the strainer bottom and has a connection to the bottom of the strainer basket. When solids accumulate in the bottom of the basket, the backflush valve opens and the differential between the oper-


ating pressure and the backflush system removes the solids. The second step, backwashing, reverses the flow and removes residual dirt.

Optional Steam Jacketing

Available in carbon steel or 316SS rated for service up to 450°F. This is ideal for the high temperatures required to process and transport heavy, viscous fluids without affecting the function or normal maintenance of the strainer. Steam jacketing maintains critical fluid temperature throughout the strainer.

Design and fabrication to ASME section VIII and ANSI B31.1 codes are available.

2" - 12" Fabricated Offset Duplex Strainer

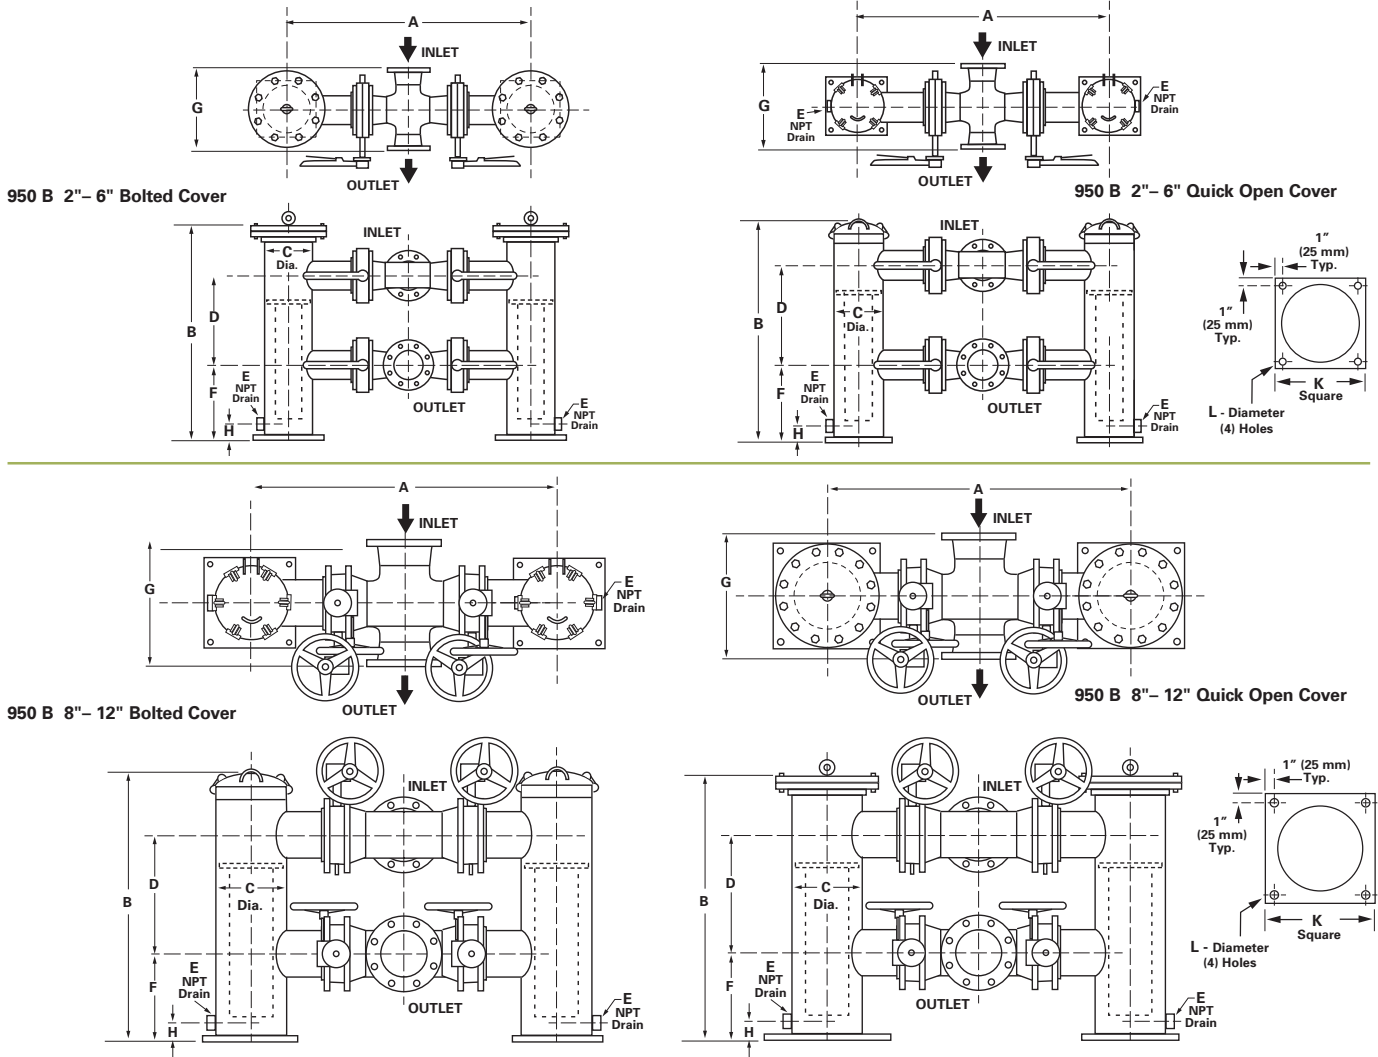

Dimensions (in/mm)

Pipe Size	Quick Open		Bolted		C	D	E	F	G	H	K	L	Weight Quick Open (lbs / kg)	Weight Bolted (lbs / kg)
	A	B	B	B										
2	35.25 / 895	36.63 / 930	34.25 / 884	6.63 / 168	16.00 / 406	1	12.00 / 305	10.25 / 203	3.00 / 76	8.00 / 203	0.75 / 19	320 / 145	345 / 156	
3	39.50 / 1003	38.63 / 981	38.00 / 965	6.63 / 168	16.00 / 406	1	14.00 / 356	12.50 / 318	3.00 / 76	8.00 / 203	0.75 / 19	410 / 186	430 / 195	
4	43.75 / 1111	41.50 / 1054	41.00 / 1041	8.63 / 219	18.00 / 457	1	14.00 / 356	14.50 / 368	3.00 / 76	10.00 / 254	0.75 / 19	650 / 294	700 / 317	
6	53.00 / 1346	43.25 / 1099	42.00 / 1087	10.75 / 273	18.00 / 457	1	14.00 / 356	18.50 / 470	3.00 / 76	12.00 / 305	0.75 / 19	1300 / 589	1100 / 499	
8	56.25 / 1429	48.00 / 1219	46.00 / 1168	12.75 / 324	25.00 / 635	1-1/2	10.00 / 254	22.25 / 565	3.25 / 83	17.00 / 432	0.75 / 19	1685 / 763	1800 / 815	
10	64.75 / 1645	51.75 / 1314	52.00 / 1321	16.00 / 406	26.00 / 660	1-1/2	10.00 / 254	25.25 / 641	3.50 / 89	19.00 / 483	0.75 / 19	2120 / 960	2300 / 1042	
12	72.50 / 1842	57.75 / 1467	54.00 / 1372	18.00 / 457	28.00 / 711	1-1/2	12.00 / 305	29.25 / 743	4.00 / 102	21.00 / 533	1.00 / 25	3270 / 1481	3500 / 1586	

DEWATER PRODUCTS

sales@dewaterproducts.com.au

www.dewaterproducts.com.au