

Available Pressures

PN 10
 PN 16
 PN 25
 PN 40

Description and Materials:

Body: 316 Stainless Steel

Strainer: 316 Stainless Steel




SIZES	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600	700	800
FLANGES	ISO 7005/2 - DIN 2501 - BS 4504 - BS 10E - ANSI (Please refer to the Flanges Dimensions)																
OPERATING TEMPERATURE	-10C.....+80C																

MESH SIZE - TRAP CAPACITY FOR VARIOUS NEEDS

Flanged Suction Strainers are manufactured from 316 Stainless Steel and can be used in harsh and highly corrosive environments. Being constantly submerged in fluid, our strainers will be reliable for most scenarios requiring filtration.

COMPACT DESIGN

Crepine Type Strainers consist of only a flange and a filter. This allows it to have low weight & dimensions, which provide easy installation & transportation.

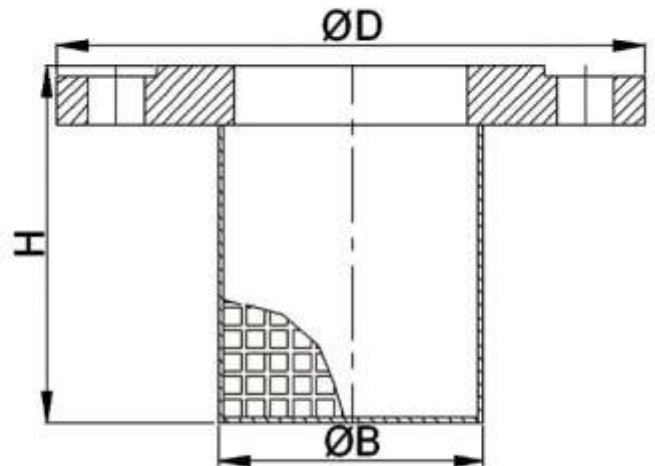

Crepine Type Strainer is installed to protect system appliances, such as: pumps, watermeters, automatic valves or control devices. Its main function is to protect the system from foreign matter like leaves, sticks and stones from the pipelines. The foreign particles that can harm crucial appliances in the system are stuck in the filter of the strainer.

		DIMENSIONS (mm)																
DN		40	50	65	80	100	125	150	200	250	300	350	400	450	500	600	700	800
H		80	90	130	130	160	200	225	300	350	425	450	525	550	650	750	850	1000
D		150	165	185	200	220	250	285	340	395	445	505	565	615	670	785	895	1015
B		50	60	80	90	110	140	165	220	276	327	359	411	462	513	616	715	817
Weight (Kg)		2,5	3,5	4,5	5,5	6	9	11	15	18	22	28	32	36	42	60	85	120

sales@dewaterproducts.com.au