




Pipe Coupling model: COMBO LOCK

1. Available in S or L, short or long versions
2. Axially restrained pipe coupling for connect PE plastic pipe with Metal pipe
3. Prevents pipe connections from being pushed or pulled with grip rings and teeth locking the pipes in place together with the tightening of the bolt mechanism and solid bars.
4. Good for connecting Metal pipe with PE or other plastic pipe
5. 316 Stainless Steel Coupling with EPDM, NBR, VITON or GORE-TEX seal

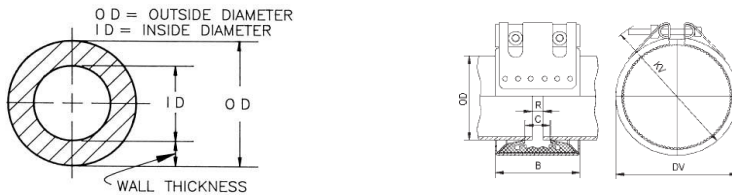

| Coupling Size | PE Pipe OD | Metal Pipe OD | Short length | Long Length | Pipe Gap (R) Short | Pipe Gap (R) Long | Maximum Bolt Tightness | Pressure | Estimated weight |
|---------------|------------|---------------|--------------|-------------|--------------------|-------------------|------------------------|----------|------------------|
| (mm) | (mm) | (mm) | (mm) | (mm) | (mm) | (mm) | (Nm) | Bar | (Kg) |
| 40 | 40 | 42.4 | 57 | 100 | 5 | 15 | 15 | 32 | 0.55 |
| 50 | 50 | 48.3 | 80 | 139 | 5 | 15 | 15 | 32 | 1.2 |
| 63 | 63 | 60.3 | 80 | 139 | 5 | 15 | 30 | 32 | 1.3 |
| 75 | 75 | 76.1 | 107 | 203 | 5 | 30 | 30 | 28 | 2.7 |
| 90 | 90 | 88.9 | 107 | 203 | 5 | 30 | 30 | 28 | 3.4 |
| 110 | 110 | 108 | 116 | 203 | 5 | 30 | 50 | 28 | 4.8 |
| 110 | 110 | 114.3 | 116 | 203 | 5 | 30 | 50 | 24 | 5.8 |
| 140 | 140 | 139.7 | 116 | 203 | 5 | 30 | 50 | 20 | 6 |
| 160 | 160 | 168.3 | 116 | 203 | 5 | 40 | 80 | 20 | 6.5 |

