



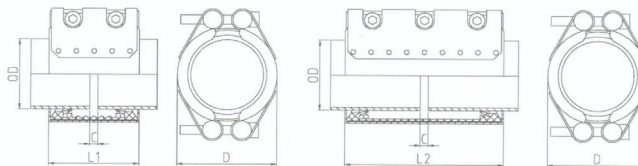

## Pipe Coupling model: FLEX GRIP 2

**2 Part Casing Design, Opens into 2 halves**

1. Available in S - short length, or L - long length models
2. Non-axially restrained Pipe Coupling, and can also be used as a Pipe Repair Clamp.
3. Allows slight misaligned pipe connection, increased tolerance when installing
4. Allows vibration in the pipeline and slight movement, increased sealing strength
5. Good for connecting Metal, PE, FRP, GRP, PVC and rubber lined pipes
6. 316 Stainless Steel Casing with EPDM, NBR, VITON or SILICONE seal options



### Higher Bar pressures available

OD	Pipe OD Range	Short length	Long Length	Pipe Gap (R) Short	Pipe Gap (R) Long	Maximum Bolt Tightness	Pressure	Estimated weight
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(Nm)	Bar	(Kg)
42.4	42-44	57	100	5	15	15	32	0.8
48.3	47-49	57	100	5	15	15	32	0.85
60.3	59-62	80	139	5	15	30	32	1.8
73.0	72-74	80	139	5	30	30	32	1.9
88.9	88-92	107	203	5	30	30	28	3.9
114.3	112-116	107	203	5	30	50	28	4.3
141.3	139-143	116	203	5	30	50	28	6.5
168.3	166-170	116	203	10	40	50	24	7.1
219.1	217-221	155	255	10	40	80	16	15.3
273.0	271-275	155	255	10	40	100	16	16.3
323.9	322-326	155	255	10	40	100	16	20.1
355.6	353-357	155	255	10	40	100	14	22.9
406.4	404-408	155	255	10	40	100	12	24
457.2	455-459	155	255	10	40	120	12	25.8
508.0	506-510	155	255	10	40	120	10	26.5
558.8	556-560	155	255	10	40	120	9	28
609.6	607-611	155	255	10	40	120	8	30
711.2	709-713	155	255	10	40	120	7	32

More sizes available up to 4000.0mm

Any OD size can be manufactured

[www.orbitcouplings.com.au](http://www.orbitcouplings.com.au)

