



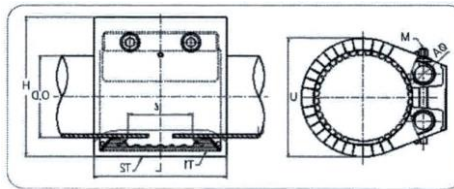

Pipe Coupling model: Fire Protection Cover ML

1. Available in S, short model - Metal Lock S coupling only
2. Axially restrained pipe coupling, no pull out or vibration
3. Fire Testing according to ISO 19922 regulation 30 minutes at 800 C
4. Maintains internal structure of the coupling during a fire
5. Can only be used with Metal pipe - only suitable material
6. 316 Stainless Steel Coupling with EPDM, NBR, VITON or GORE-TEX seal



OD	Pipe OD Range	Short length	Long Length	Pipe Gap (R) Short	Pipe Gap (R) Long	Maximum Bolt Tightness	Pressure	Estimated weight
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(Nm)	Bar	(Kg)
26.9	24.9 - 28.9	68	n/a	5	n/a	15	32	0.32
33.4	31.4 - 35.4	68	n/a	5	n/a	15	32	0.35
42.2	40.2 - 44.2	68	n/a	5	n/a	15	32	0.45
48.3	46.3 - 50.3	68	n/a	5	n/a	15	32	0.5
60.3	58.3 - 62.3	94	n/a	5	n/a	30	32	1
73.0	71 - 75	94	n/a	5	n/a	30	28	1.2
88.9	86.9 - 90.9	122	n/a	5	n/a	50	28	2.1
101.6	99.6 - 103.6	122	n/a	5	n/a	50	28	2.4
114.3	112.3 - 116.3	122	n/a	5	n/a	50	28	2.4
141.3	139.3 - 143.3	138	n/a	5	n/a	80	28	3.8
168.3	166.3 - 170.3	138	n/a	5	n/a	80	24	4.2
219.1	217.1 - 221.1	176	n/a	5	n/a	100	16	11.2
273.0	271 - 275	176	n/a	5	n/a	100	16	12.9
323.9	321.9 - 325.9	176	n/a	5	n/a	100	14	14.9
355.6	353.6 - 357.3	176	n/a	5	n/a	100	14	16.1

Sizes available 20mm to 350mm

